



## 2/19AWG Telephone Cable

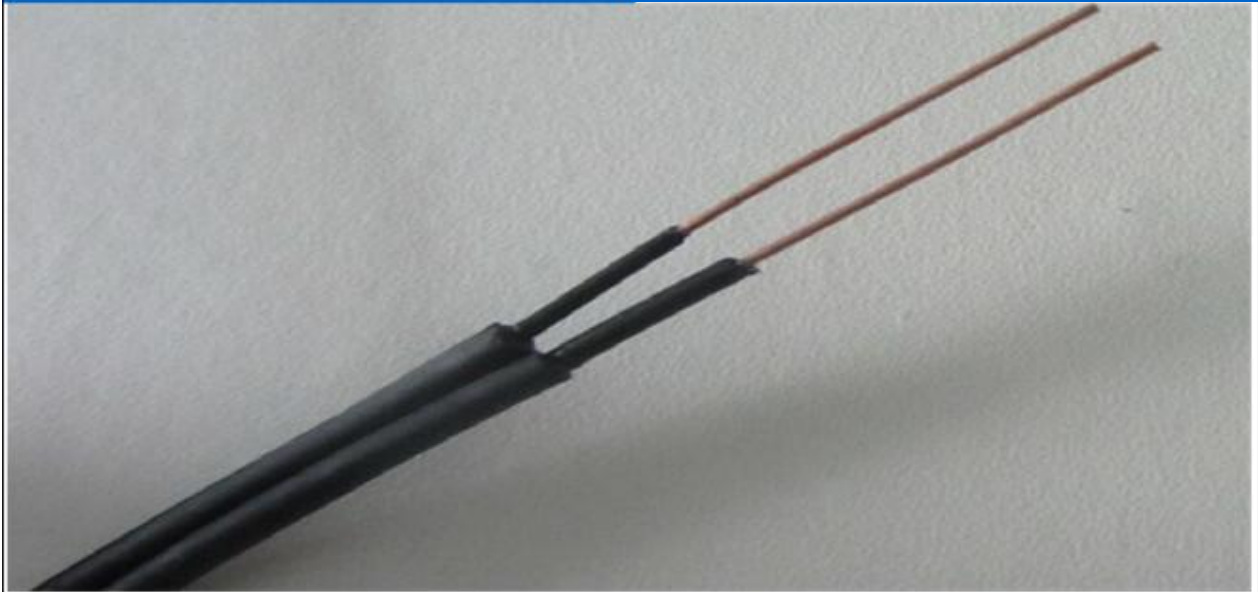

Structure :

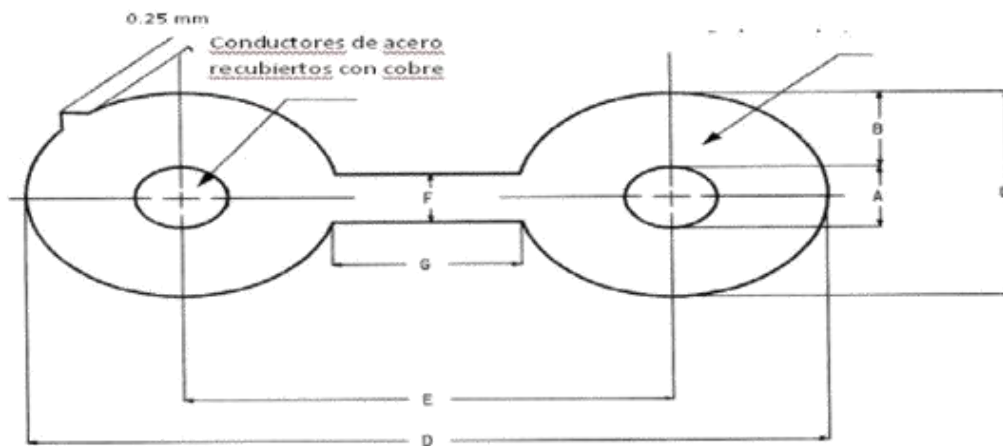

### DIMENSIONES

(mm)

	A	B	C	D	E	F	G
MÍNIMO	0.903	1.02	2.94	7.75	4.81	0.76	1.87
MÁXIMO	0.921	1.13	3.18	8.5	5.319	1.016	2.138

## DESCRIPTION

2X19AWG , Telephone Cable

## FEATURES

- High-Quality Telephone Cable
- 1 pair CCS
- Easily Identified Color-Striped Pairs
- 19AWG CCS Conductors

## APPLICATION

ASTM B 227 – 04  
ANSI / ASQ Z1.4-2003 (Table I and Table II-A) standard  
Structure Cabling  
Outdoor use

## SPECIFICATION

### Technical Data

Characteristic impedance	Max $85 \pm 15 \Omega / 1000 \text{ m}$
Insulation resistance, minimum	16000 M $\Omega / \text{km}$
<b>Conductor</b>	<b>CCS Stell Grade 30 HS</b>
Material	CCS (>6% Copper)
AWG	19AWG
Conductor Diameter	$2 \times 1 / 0.91 \pm 0.01 \text{ mm}$
<b>Insulation</b>	<b>HDPE</b>
Material	PE
AVG. Thickness	$1.02 \pm 0.01 \text{ mm}$
Insulation Diameter	$2.94 \pm 0.01 \text{ mm}$
<b>High twisted &amp; Ripcord</b>	<b>No</b>
<b>Jacket</b>	<b>PVC (Fire Retardant)</b>

## PACKING:

