

OSP Broadband Category 5e

Product Description

BBD Category 5e Outside Plant (OSP) cables are designed to provide extension of the LAN beyond the premises. The core is filled with PFM™ thixotropic filling compound to prevent water ingress. PFM gel will not drip even in cell tower applications at elevated temperatures. A variety of constructions are available to suit multiple environmental needs. Shielded designs feature dry water block between the shield and the core jacket to prevent water ingress. Shielded designs are suitable for direct buried applications; the unshielded design requires a duct or conduit.

Applications


- 10BASE-T through 10GBASE-T Ethernet
- IEEE 802.3af, Power over Ethernet (PoE)
- IEEE 802.3at Type 1 and 2, PoE+
- ATM and token ring
- WiMAX cell towers
- BBDNe: Lashed aerial, underground conduit or low-risk direct burial
- BBDGe: Direct burial where additional mechanical protection is required

Features

- Transmission performance characterized to 350 MHz
- BBDDe: Unshielded
- BBDNe: Aluminum tape shield
- BBDGe: Copper-clad steel armor
- Dry block between shield/armor and inner jacket
- PFM gel-filled core construction
- OSP-grade black polyethylene jacket
- ColorTip™ circuit identification system

Benefits

- OSP rated cable connections for work area and backbone LAN
- Small, robust design for unshielded applications
- Protection against EMI/RFI
- Protection against EMI/RFI and provides rodent resistance
- Prevents water ingress between shield in inner cable preventing damage to equipment
- Prevents intrusion of moisture and easily wipes clean during installation
- Outside plant rated cable for years of reliable performance
- Easily identifiable conductor mates even in low-light environments

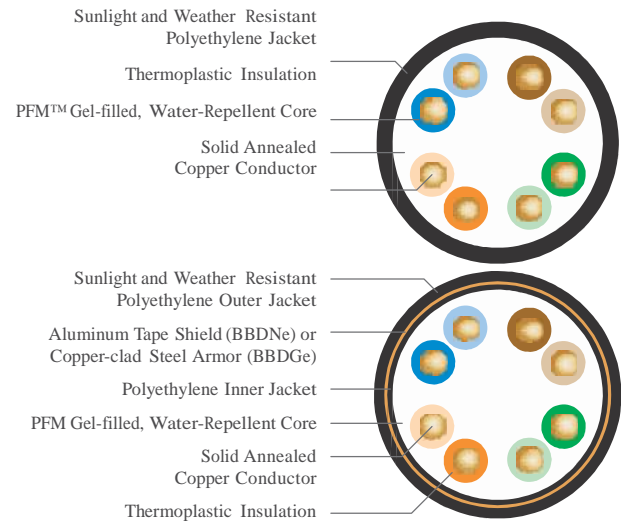

Specifications

Pair Count	4
Conductor	Solid annealed copper
AWG (mm)	24 (0.51)
Filling Compound	PFM™ thixotropic gel
Insulation	Solid polyolefin
Shield/Armor	BBDDe: Unshielded BBDNe: Electrically continuous 0.008 in (0.20 mm) polymer coated smooth aluminum tape, applied with an overlap BBDGe: Electrically continuous 0.005 in (0.13 mm) corrugated copper-clad steel armor, applied with an overlap
Dry Water Block	BBDNe: SAP powder BBDGe: SAP yarn
Jacket	Black, sunlight and weather resistant polyethylene
Characteristic Impedance Ohms	100 ± 15
Nominal Velocity of Propagation %	65
Performance Compliance	ANSI/TIA-568-C.2 ANSI/ICEA S-107-704-2006 RoHS-compliant REACH-compliant

Part Numbers and Physical Characteristics

Part Number	Product Code	Shield/Armor	Nominal Diameter in (mm)	Approx. Weight lbs/kft (kg/km)	Package
104-001-581	BBDDe	None	0.26 (6.6)	30 (45)	1,000' Plywood reel
104-002-581	BBDDe	None	0.26 (6.6)	30 (45)	2,500' Plywood reel
104-003-581	BBDDe	None	0.26 (6.6)	30 (45)	5,000' Plywood reel
104-601-581	BBDDe	None	0.26 (6.6)	30 (45)	Cut to length
104-001-541	BBDNe	Coated aluminum tape	0.36 (9.1)	55 (82)	1,000' Plywood reel
104-002-541	BBDNe	Coated aluminum tape	0.36 (9.1)	55 (82)	2,500' Plywood reel
104-003-541	BBDNe	Coated aluminum tape	0.36 (9.1)	55 (82)	5,000' Plywood reel
104-601-541	BBDNe	Coated aluminum tape	0.36 (9.1)	55 (82)	Cut to length
104-001-551	BBDGe	Copper-clad steel	0.36 (9.1)	64 (95)	1,000' Plywood reel
104-002-551	BBDGe	Copper-clad steel	0.36 (9.1)	64 (95)	2,500' Plywood reel
104-003-551	BBDGe	Copper-clad steel	0.36 (9.1)	64 (95)	5,000' Plywood reel
104-601-551	BBDGe	Copper-clad steel	0.36 (9.1)	64 (95)	Cut to length